
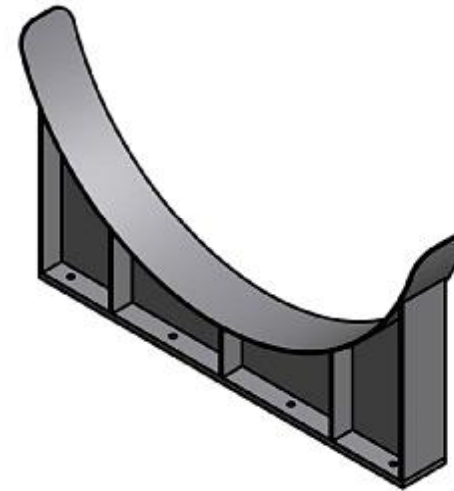
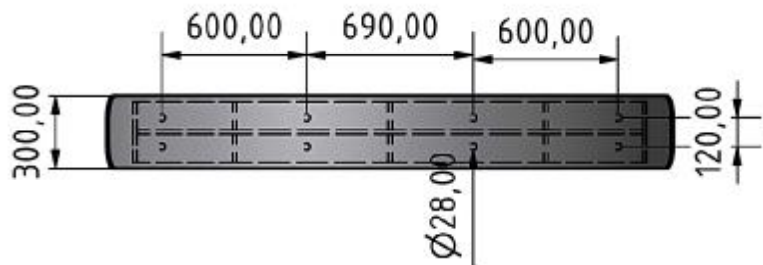
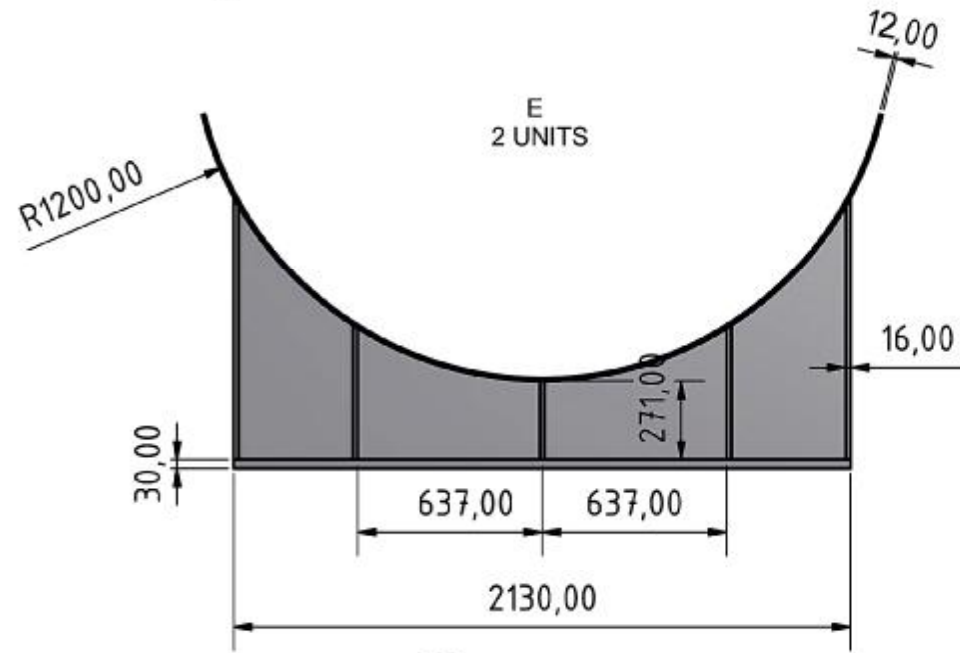


According to ASME IX standard.  
 The tanks will store chemical product.  
 Working temperature is 50 .  
 Surrounding temperature -10 to 40 .  
 Requested Pickling and Passivation  
 There is no painting requirements  
 Requested is thermal insulation.

General Tolerance	± 0.5	Date	Sign	Material	Stainless steel 304
Drawer		15.02.2017		Unit	
Accept		15.02.2017		pressure	8-10kg
Project Name					Количество = 30 бр.
Drawing Name					
Scale					
1/1	Part Name	25 M³ ABOVEGROUND TANK.dwg			

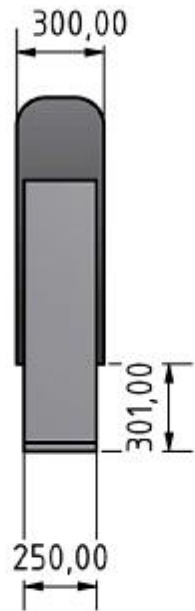

According to ASME IX standard.  
 The tanks will store chemical product.  
 Working temperature is 50 .  
 Surrounding temperature -10 to 40 .  
 Requested Pickling and Passivation  
 There is no painting requirements  
 Requested is thermal insulation.

General Tolerance	± 0.5	Date	Sign	Material	Stainless steel 304
Drawer		15.02.2017		Unit	
Accept		15.02.2017		pressure	8-10kg
Project Name					Количество = 30 бр.
Drawing Name					
Scale					
1/1	Part Name	25 M³ ABOVEGROUND TANK.dwg			